





## Technical drawing



## Illustrative pictures

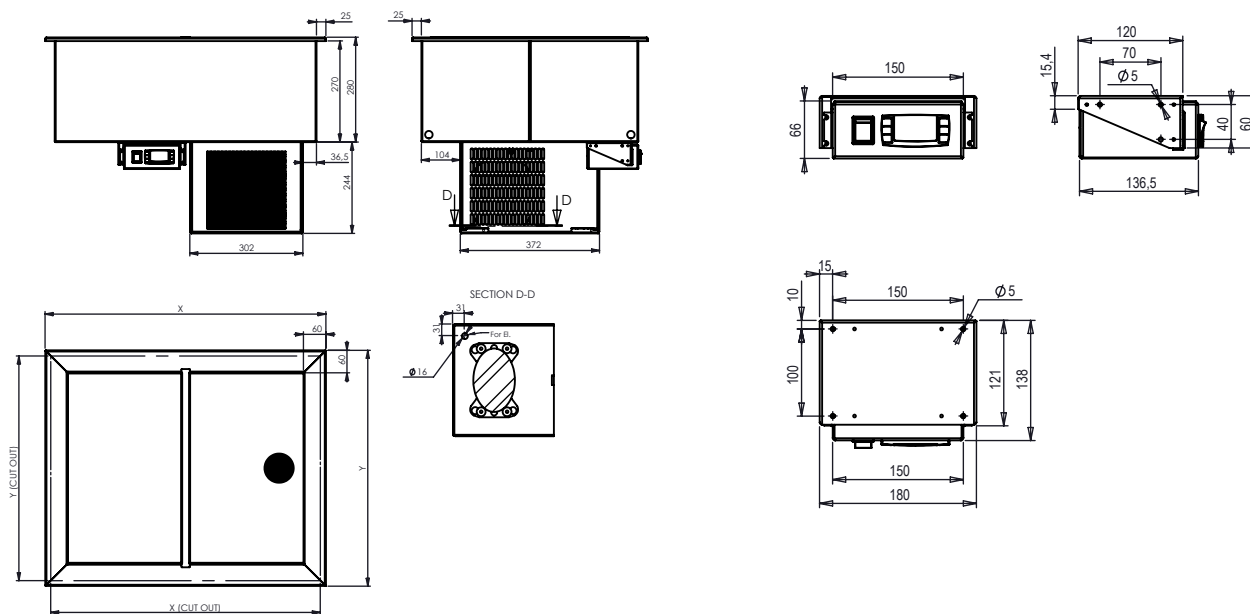

## SPECIFICATION LIST

SELF CONTAINED	I.	II.	III.	IV.	V.	VI.
Catalog number						
<b>Outside dimension:</b>						
Width (x) [mm]	425	750	1075	1400	1725	2050
Depth (y) [mm]	630	630	630	630	630	630
 Height (z) [mm]	524	524	524	524	524	524
<b>Installation dimensions:</b>						
Width (x) [mm]	395	720	1045	1370	1695	2020
Depth (y) [mm]	600	600	600	600	600	600
 Temperature	1 - 6°C					
Cooling medium   weight	R134A   0, 11 Kg	R134A   0, 12 Kg	R134A   0, 12 Kg	R134A   0, 14 Kg	R134A   0, 14 Kg	R134A   0, 16 Kg
Refr. capacity (evap. @ -15°C)	140 W	170 W	210 W	260 W	260 W	340 W
Compressor	GL45TB	GL60TB	GL80TB	GL90TB	GL90TB	GL12TB
Condenser	STFT12118	TK570	TK570	TK680	TK680	TK860
Control (DIXELL)	XR20CX	XR20CX	XR20CX	XR20CX	XR20CX	XR20CX
Isolation	35 mm					
Voltage	1, N, PE ~ 230V, 50Hz					
 Power input	165 W	198 W	220 W	275 W	330 W	385 W
Material	1.4301					
Spare parts*						