


About

Cooling tables are available with different numbers of chambers for optimal use of space. The tables come with doors or drawers that can be combined. The drawers slide out on telescopic rails, which allow easy pulling out and easy removal or loading of used gastro containers.

This lowered cooling table allows better use of space - height is 460mm or 520mm.

Made from stainless steel material, so it is easy to clean and guarantees a long-term service life.

Technical drawing

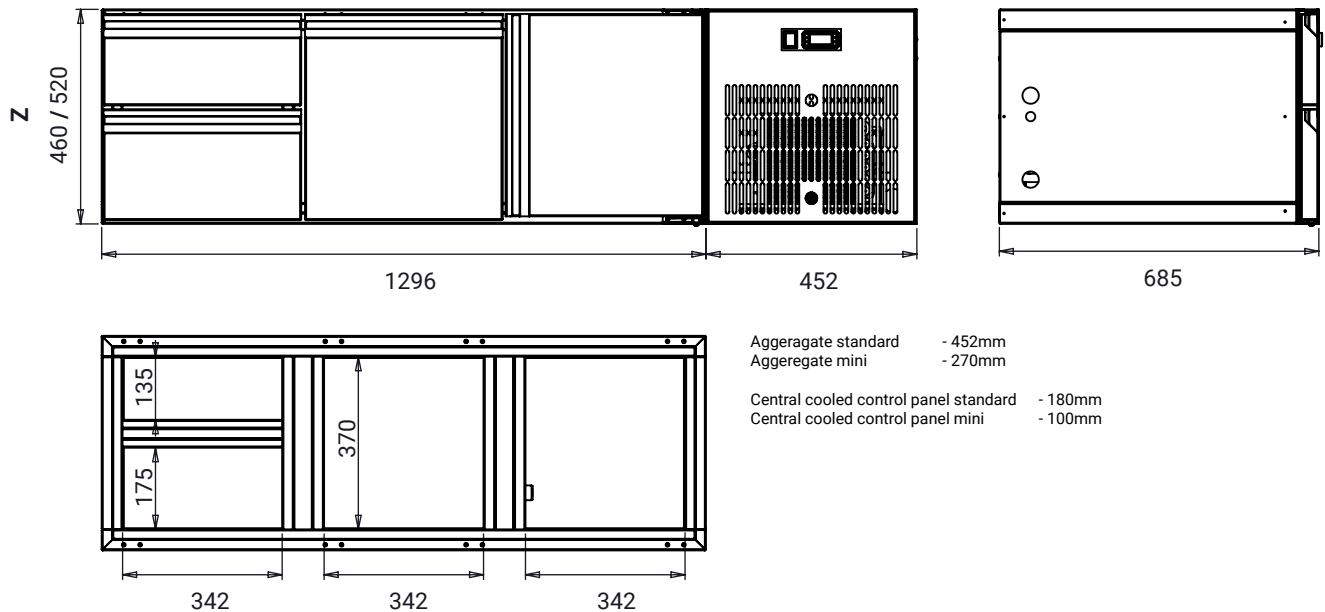

Specification list

| Self contained | 1GN | 2GN | 3GN | 4GN | 5GN |
|---|------------------------|--------|--------|--------|--------|
| Dimensions: | | | | | |
| Outside dimension Width (x) [mm] Without aggregate | 432 | 864 | 1296 | 1728 | 2160 |
| Outside dimension Width (x) [mm] With standard aggregate | 884 | 1316 | 1748 | 2180 | 2612 |
| Outside dimension Depth (y) x Height (z) [mm] | 685 x 460 / 520 | | | | |
| Insulation | 45mm | | | | |
| SPL (distance 1m) | 35 - 50 dB(A) | | | | |
| Temperature | +1°C ~ +6°C | | | | |
| Cooling medium | R600 | R290 | | | |
| Refr. capacity (evap. @ -10°C) | 0,13kW | 0,17kW | 0,28kW | 0,35kW | 0,42kW |
| Voltage | 1, N, PE ~ 230V / 50Hz | | | | |
| Power input | 0,1kW | 0,15kW | 0,22kW | 0,24kW | 0,28kW |
| Central cooled | 0,13kW | 0,17kW | 0,28kW | 0,35kW | 0,42kW |
| Material | Stainless steel | | | | |

Accessories for tables with a height of 460mm

Standard doors for Lowered tables 460

Drawers 100 + 150 for Lowered tables 460

Drawer 200 for Lowered tables 460

Accessories for tables with a height of 520mm

Standard doors for Lowered tables 520

Drawer 200 for Lowered tables 520